




Installation Instructions
JLT Oil Separator, Passenger Side
(2011-18 SRT 6.4 L HEMI Charger, Challenger, 300C, Jeep Grand Cherokee & Durango)
#3063P

Please review complete instructions prior to installing.


Step#	
1	Verify you have all of the following parts included in the kit: (1) JLT Oil Separator w/fittings, (1) Mounting Bracket, (2) Fine Thread Machine Screws, (1) 12" hose with fitting, (1) Kwik clamp
2	Gather all of the following tools needed for the installation: 15mm socket and ratchet and Phillips screw driver. A Pair of pliers.
3	<p>Remove the factory PCV hardline from both rubber connection points. Flip the 90 degree fitting so the long side is facing outward</p>   

- 4) Install mounting JLT bracket to engine using existing 15mm bolt.
- 5) Mount Separator onto JLT bracket using supplied screws.
- 6) Install clamp onto rubber elbow, slide elbow onto oil separator fitting and squeeze clamp down with a pliers. The fitting on the intake manifold is very long, the elbow does not need to be flush with the bottom to seal.



4,5,6

Use light oil on the fitting coming off of the can to install supplied 12" hose, this hose is a push loc and will not need clamps. Push fitting into rubber connector on intake manifold (near oil fill cap)

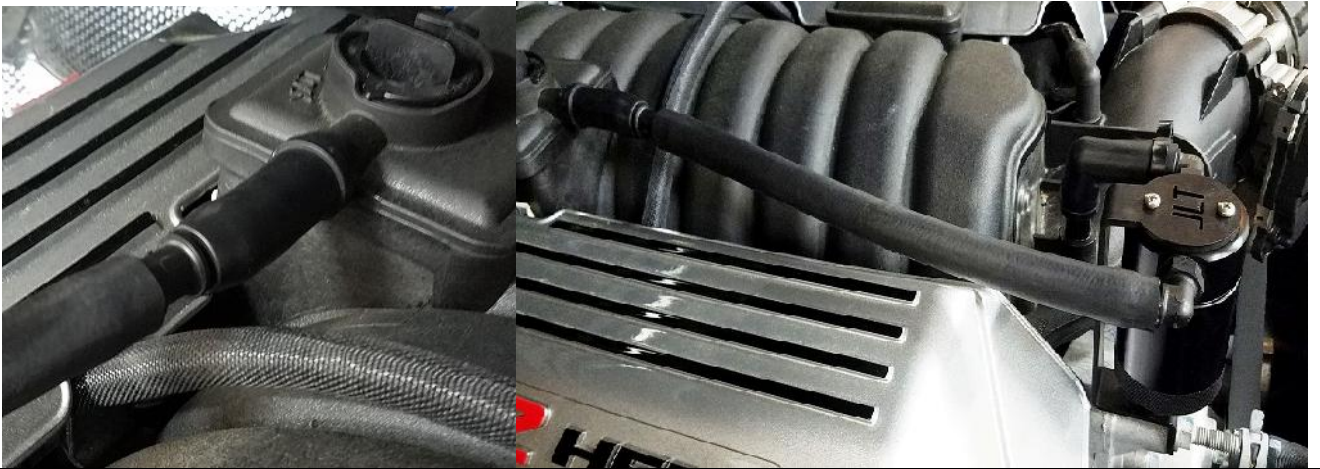

7

To properly clean the filter in the Oil Separator spray any degreaser or solvent through it and let it air dry. Clean it every 10,000 miles. Thanks for the business. If you have any questions, please e-mail info@JLTtruecoldair.com or call 757-335-1940. Our hours are Monday-Friday. 8:00am – 5:00pm Eastern Time.

Warranty: JLT Performance Inc. will repair or replace any part of their product found upon our inspection to be defective in workmanship or material within 1 year from the purchase date for the original purchaser.

Disclaimer: JLT Performance Inc. makes no warranties whatsoever, expressed or implied, oral or written to any purchasers, except the warranty above. JLT Performance Inc. hereby specifically excludes from any implied warranty of merchantability or implied warranty of incidental, secondary, or consequential damages of any kind whatsoever. All purchasers and users of products manufactured by JLT Performance Inc. agree to hold harmless and indemnify JLT Performance Inc. from any and all claims arising from their use. Failure to receive notice of any or the limitations contained in this disclaimer shall not serve to extend liability to JLT Performance Inc. for any claims arising out of use of its products.

Return Policy: All returns will be subject to a 10%-25% restocking fee. Please visit www.JLTtruecoldair.com for complete return policy.